

A standard 1 1/4" hole will be die cut into your Doorhanger. Be sure to allow enough text safety so that no design elements are affected when die cut.

## BORDERS

Minimum border thickness must be 1/4 (.25") thick plus the 1/8 (.125") bleed. Total border size from the bleed line is 3/8 (.375")

### Bleed

Artwork that reaches the cut line needs to extend out an 1/8" from the cut line.

### Cut Line


This is where your artwork will be trimmed. Finished size of card.

### Margin

All text must be kept within the margin. (blue line)

## 4.25" x 11" Doorhanger

When exporting PDF, be sure to check "Use Document Bleed Settings"

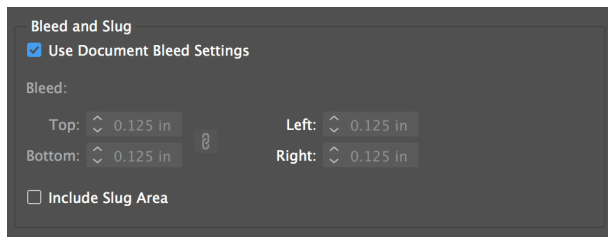


Bleed and Slug

Use Document Bleed Settings

Bleed:

Top:	0.125 in	Left:	0.125 in
Bottom:	0.125 in	Right:	0.125 in

Include Slug Area

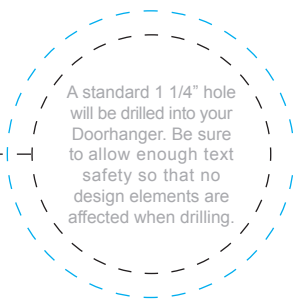

A standard 1 1/4" hole will be drilled into your Doorhanger. Be sure to allow enough text safety so that no design elements are affected when drilling.

**ARTWORK WITH BORDERS**

Minimum border thickness must be 1/4 (0.25") thick plus the 1/8 (0.125") bleed for correct print ready artwork. Total border size from the bleed line is 3/8 (0.375"). Border example on the left.

**bleed** →  
Artwork that reaches the outline needs to extend to the edge of the red line.

**cut line** →  
This is where your artwork will be trimmed. (Finished size ordered)

**safety** →  
All text must be kept within the blue line

**3.5 x 8.5" Doorhanger Back**

Please delete this guideline before submitting your design to print.

